

Mila 40F New High Tech Series

**! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference**

Marine grade downlight



STEIN
MARINE LIVING



Optional


Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

Product Specifications

Power Consumption	: 4 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Protection	: Temperature Control
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 480 Lumens

Can Control Temp	Does Not Cause fire	High Voltage Limit	Does Not Cause Frequency


Dimensions

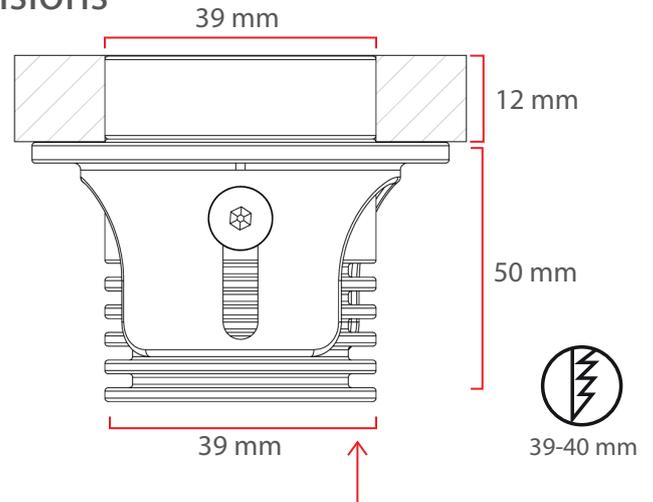

Material Colors



Light Angle




And Other Ral Codes

Optional Connection




Standart Connection



These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Mounting

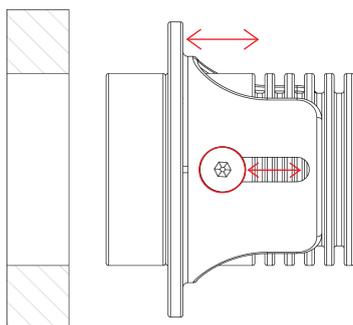


Area Of Application

IP 40 Interior

1. Cut the panel with the specified hole diameter.
2. Pass the product through the hole and adjust its height by loosening the screws.
3. Tighten the screws again and mount the installation bracket with a screw.

Light Colors



Certifications

