

BL 1450-Y New High Tech Series


**! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference**

Marine grade downlight




Product Specifications

Power Consumption	: 3 X 3 = 9 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Optional Driverless	:
Light Source Led	:LED
Dimmable	: PWM,Voltage, Current
Luminous Flux	: 1.260 Lumens

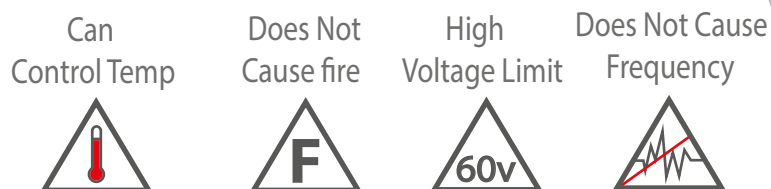


Dimensions

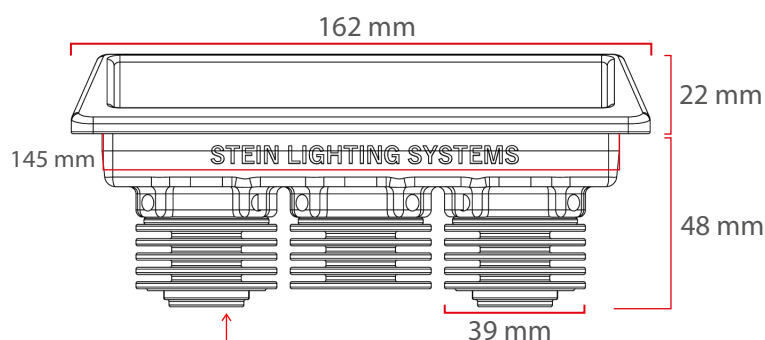

The Driver Is Protected In
An Aluminum Housing

These Dimensions Can Be
Changed Optionally




Material Colors



And Other Ral Codes


Light Angle



Optional Connection




Standart Connection




Area Of Application Exterior


Mounting

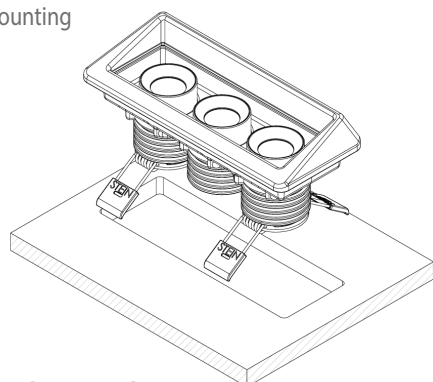

1. Apply insulation material to the hole you made
2. Pass the product through the hole by stretching the springs

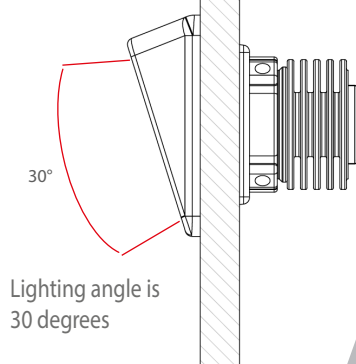

Light Colors



Certifications

