

BL 2062-S New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight




Product Specifications

Power Consumption	: 5 X 3 = 15 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Optional Driverless	:
Light Source Led	:LED
Dimmable	: PWM,Voltage, Current
Luminous Flux	: 2.100 Lumens

Material Colors




Light Angle




Optional Connection




Standart Connection



Mounting

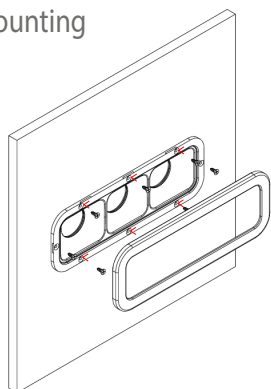


Light Colors



Can Control Temp Does Not Cause fire High Voltage Limit Does Not Cause Frequency



Dimensions

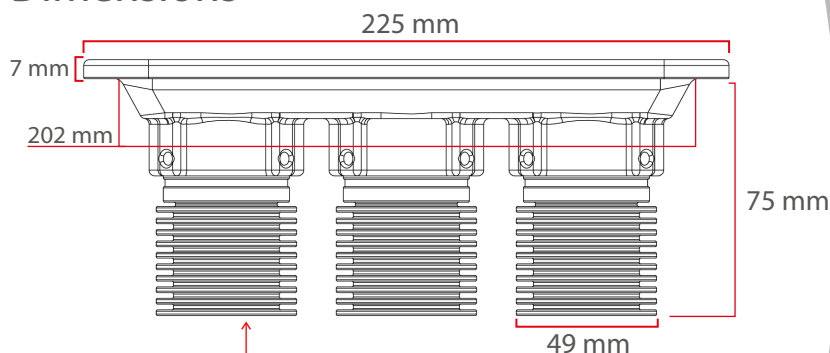

The Driver Is Protected In An Aluminum Housing

These Dimensions Can Be Changed Optionally




203 X 63 R3 mm

Area Of Application

Exterior

1. Apply insulation material to the hole before placing the product
2. Place the product into the hole you made
3. Secure the product with a screw
4. Attach the cover and apply insulation material underneath (optional)



Lighting angle is 30 degrees

Certifications

