

BL 2150 New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight



Product Specifications

Power Consumption	: 3 X 5 = 15 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Optional Driverless	:
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 2.100 Lumens

Material Colors




BLACK PLATED



WHITE PLATED

And Other Ral Codes

Light Angle



30°

Can Control Temp



Does Not Cause fire




High Voltage Limit



Does Not Cause Frequency




Dimensions

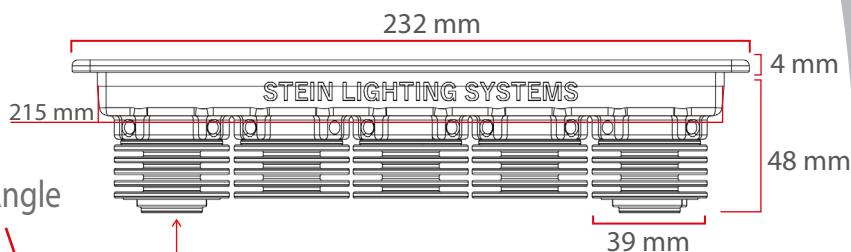

The Driver Is Protected In An Aluminum Housing

These Dimensions Can Be Changed Optionally




217 X 52 R3 mm


Optional Connection



Standart Connection




Mounting

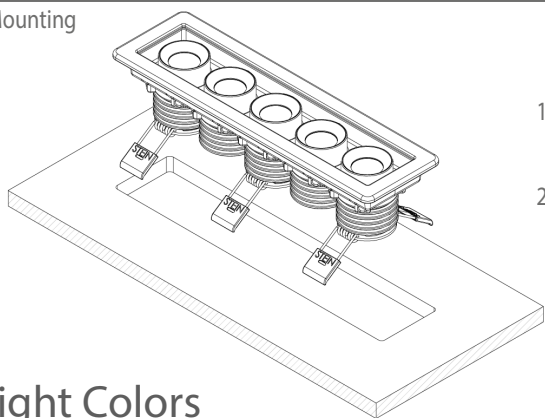


Area Of Application
Exterior

1. Apply insulation material to the hole you made
2. Pass the product through the hole by stretching the springs



Lighting angle is 30 degrees

Light Colors



6500K

3000K

Red

Blue

Green

Certifications



IP65

