


Foggy 30-40

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference




Marine Grade Downlight

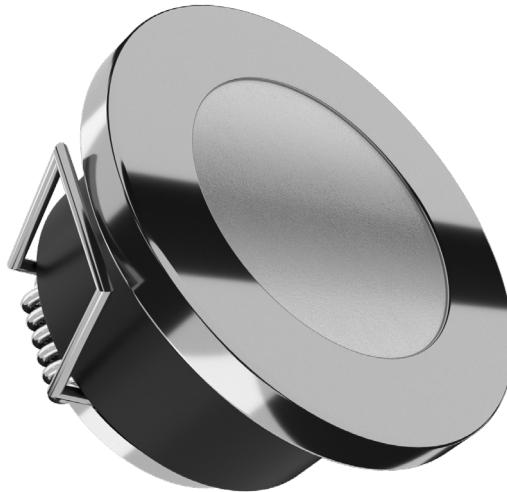

Product Specifications

Power Consumption.....: 0.25 - 1 Watt
Standart Voltage Internal Driver....: 24 VDC Protected 60 VDC
Optional Driverless.....:
Light Source Led.....: Mid Power OR High Power
Dimmable.....: PWM, Voltage, Current
Luminous Flux.....: 35 - 140 Lumens

Material Colors

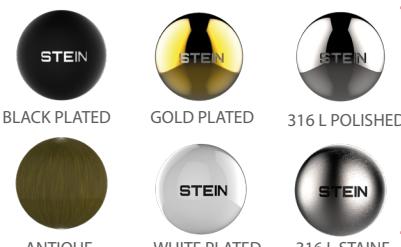

Light Angle




And Other Ral Codes

Optional

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors



Dimensions

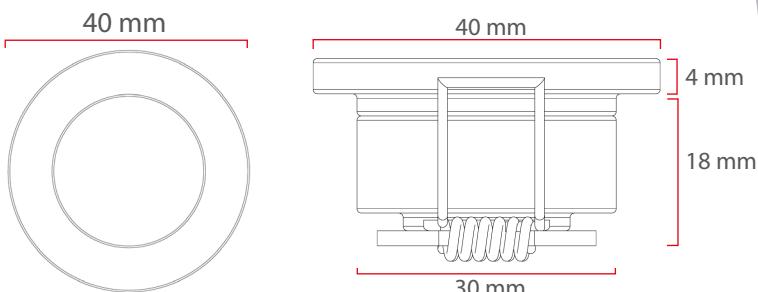

The Driver Is Protected In
An Aluminum Housing



31-32 mm


Area Of Application

Exterior

Optional Connection



Standart Connection



Light Colors



Certifications



IP65 C E