

Mila 40ASX New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight



STEIN
MARINE LIVING



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

Product Specifications

Power Consumption	: 3 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Protection	: Temperature Control
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 360 Lumens

Can Control Temp



Does Not Cause fire





High Voltage Limit



Does Not Cause Frequency



Dimensions

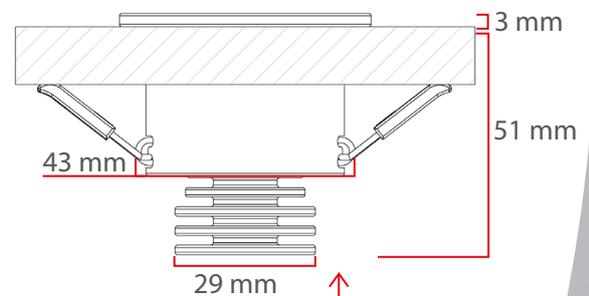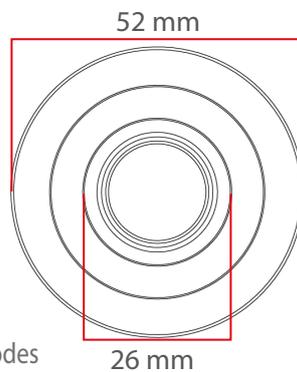

44-45 mm

Material Colors





And Other Ral Codes

These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Light Angle

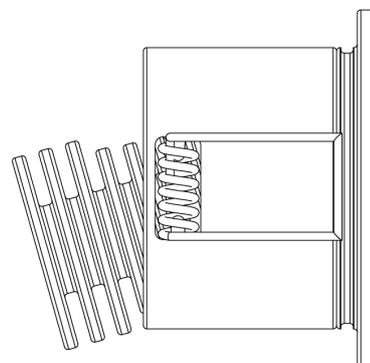


Our product can be easily moved along the horizontal axis. When users position it as desired and release it, the lamp remains xed in that position. This exibility perfectly caters to your lighting needs in any environment.


Optional Connection



Standart Connection



Light Colors



Certifications

