


FN-400

Marine & Industrial LED Luminaire

APPLICATIONS Factories | Workshops | Warehouses | Technical Areas
Utility Rooms | Marine Applications

DIMENSIONS

These dimensions can be optionally changed

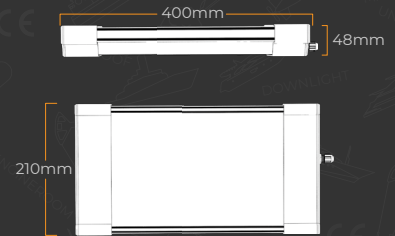

TECHNICAL SPECS


ELECTRICAL DATA

System Power	66 Watt
Nominal Operating Voltage	20-30V DC
Energy Efficiency	Up to 98%


OPTICAL PERFORMANCE

Luminous Flux	7920 lm
Luminous Efficacy	120 lm/W
Color Rendering Index (CRI)	≥90
Beam Angle	100°
Rated Lifetime	L70 lifetime >80,000h
Color Consistency	3-Step MacAdam Ellipse


BEAM ANGLE

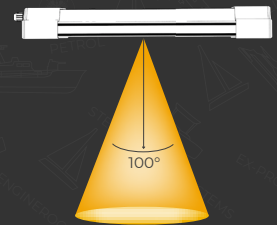

MOUNTING

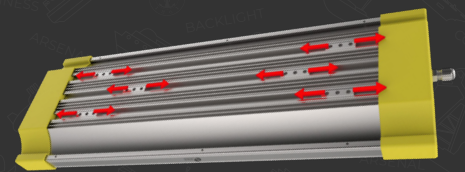

Position the adjustable mounting brackets on the rear side of the luminaire according to the installation requirements.

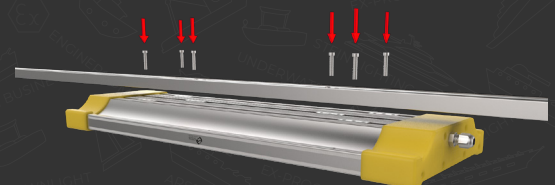

After adjusting the mounting brackets, fasten the luminaire to the installation surface as illustrated.

MATERIALS



PBT
SIDE COVER



ALUMINUM
BODY

LIGHT COLORS



6500K 3000K